


Cubby™


INSTALLATION TEMPLATE

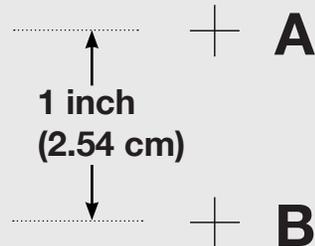

IMPORTANT !

This template should be printed out at actual size. Often printer default settings will shrink the image size to fit the page. Please ensure that this has not happened by verifying the correct distance between (A) and (B) as 1".

DRYWALL INSTALLATION (NO STUD)

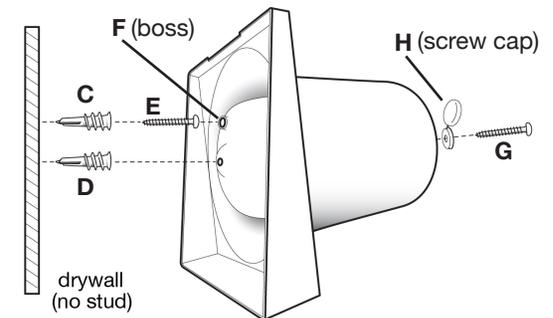

- 1) Hold template against wall in desired position.
- 2) (Optional) Use a bubble-level tool to ensure level.
- 3) With pencil or thumbtack, poke holes at (A) and (B), so that the wall is marked.
- 4) At these marks, screw in drywall anchors (C) and (D) (no drilling necessary) ensuring that they are flush to the wall.
- 5) Screw (E) into top anchor (C) until flush with wall.
- 6) Since Cubby will rest on this screw (E), it needs to extend out from the wall. Unscrew it approximately 1-1/2 turns.
- 7) Put Cubby onto extended screw by placing the boss (F) over screw head (E).
- 8) Make sure that Cubby sits flush to the wall and does not rock. Rocking can happen if the screw is extending too far outward. If this occurs, screw-in the screw (E) a little bit more.
- 9) Push the remaining screw (G) through the hole in the screw cap (H).
- 10) Place Cubby on the wall and screw-in the screw (G) until it stops. **Do not overtighten!**
- 11) Only after satisfied with the installation, reach inside Cubby to close the screw cap (H). The cap snaps securely and does not easily open again.

When de-installing Cubby from wall, it is helpful to use a pair of pliers to squeeze the screw cap (H) to pop it open, providing access to the screw.

Drywall Installation

Legal disclaimer: This product is sold "as is" and without any expressed or implied warranties. Cubby™ liability, if any, is limited to the replacement or refund of the original purchase price upon return of product. The performance of this product is subject to variable conditions.